DISSIBLE BERVICE NOTES

First Edition

SPECIFICATIONS


Power : 9V DC (BOSS PSA-100, 120, 220 or 240)

Current Draw: 50mA

Dimensions : 218(W) x 46(H) x 160(D)mm/

: 8-9/16"(W) x 1-13/16"(H) x 6-5/16"(D)


Weight : 900g / 2 lb

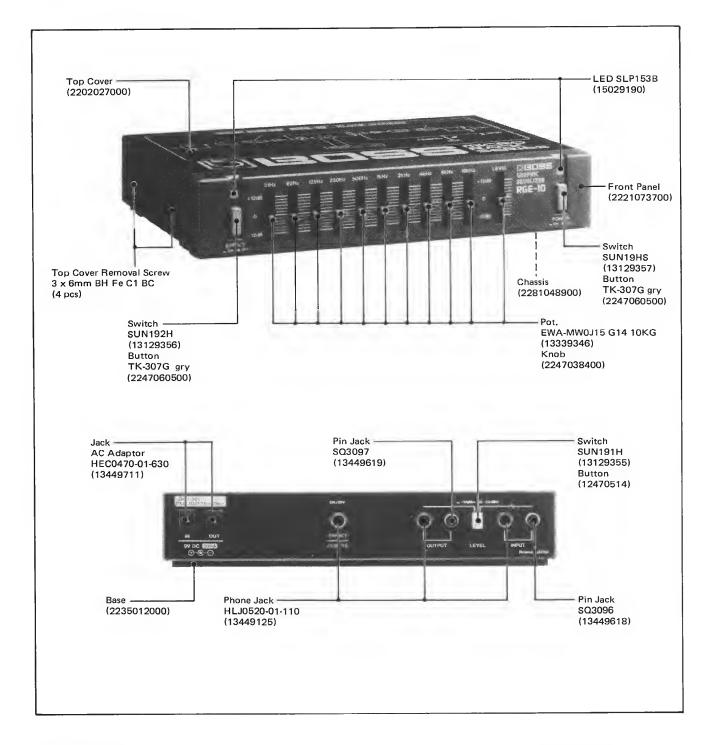


MT BOARD 74124520 Replacement PCB : Supplied in a set of VR/MT boards (pcb 2292017100)

2

VR BOARD 74124550 (pcb 2292017100 2/2)

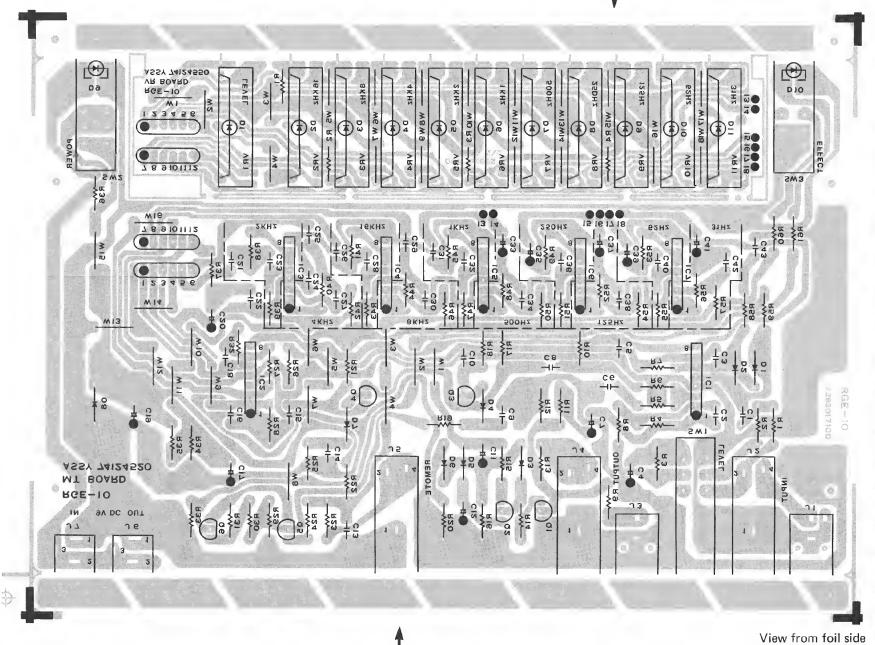

CIRCUIT DIAGRAM

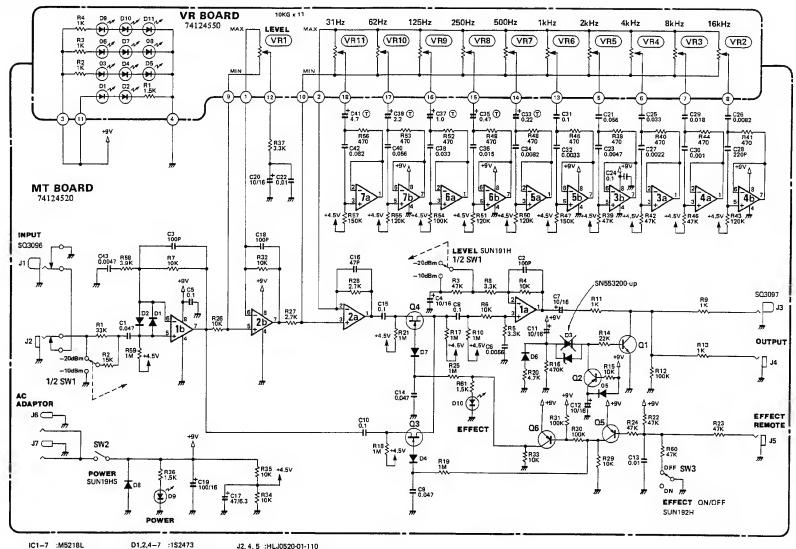

Q1 :2SC2878A Q2, 5, 6 :2SA733-P Q3.4 :2SK30ATM-GR D1,2,4-7 :1\$2473 D3 D8

:RD6.8EB2 :SS500G D9, 10 :SLP153B (LED) J2, 4, 5 :HLJ0520-01-110 J6, 7 :HEC0470-01-630 VR1-11:EWA-MWOJ15G14 10KG

Tantalum bead

PARTS LIST

CASE			
2202027000	Top Cover		
2281048900	Chassis		
2221073700	Front Panel		
2235012000	Base		
KNOB, BUTTO	N		
2247038400		Knob	potentiometer
2247060500	TK-307G	Button gry	POWER, EFFECT
12470514		Button	LEVEL
POTENTIOMET	ER		
13339346	EWA-MWOJ 1	15 G14 10KG	w/LED
SWITCH			
13129355	SUN191H		LEVEL
13129356	SUN192H		EFFECT
13129357	SUN19HS		POWER
JACK			
13449125	HLJ0520-0	01-110	phone
13449619	SQ3097		pin
13449618	SQ3096		pin
13449711	HEC0470-0	01-630	AC adaptor
PCB Replacemen	t PCB : Supplie	ed in a set of VR/MT boards	
74124520	MT BOARD	(pcb 2292017100)	w/VR BOARD
IC			
15189136	M5218L		OP amp
TRANSISTOR			
15119105	2SA733-P		
15129136	2SC2878A		
15139103	2SK30ATM-GR		FET
DIODE			
15019103	1S2473		
15019209T0	S5500G		
15029190	SLP153B		LED
15019530	RD6.8EB2		zener
FLAT CABLE			
2347016500		95L	
2347016600	6P	110L	
OTHERS			
2224052900	Mask		potentiometer
2348017400	Mold DC	Cord	